

TS57 Sensing Edge



Features

- Custom configurations
- Variety of mounting options
- Immediate activation
- Easy installation
- Fail-safe wiring available
- Durable construction
- Sealed switch compartment

TS57 is a highly sensitive, durable sensing edge which is typically used in applications which require immediate activation with considerable overtravel. It is ideal for a variety of safety applications where personnel injury could occur from high-speed powered doors or other fast moving equipment. Available in a black exterior housing, TS57 snaps easily into a choice of PVC or aluminium mounting channel and is available in custom configurations.


Typical Applications

- Lift/lower barriers
- Moving partitions
- High-speed doors
- Transport doors

Technical Specification

Actuating force (80mmØ test piece)	<120N (12.0kg)
Overtravel movement to 250N	45mm
Actuating distance (80mmØ test piece)	approx. 2mm
Housing material	Santoprene/PVC
Housing colour	Black
Ingress protection	IP65
Operating temperature	-20°C to + 50°C
Typical weight	2200g/m
Recommended max voltage	30V d.c.
Switching current @ 30Vdc	1A

Dimensions Scale 1:1

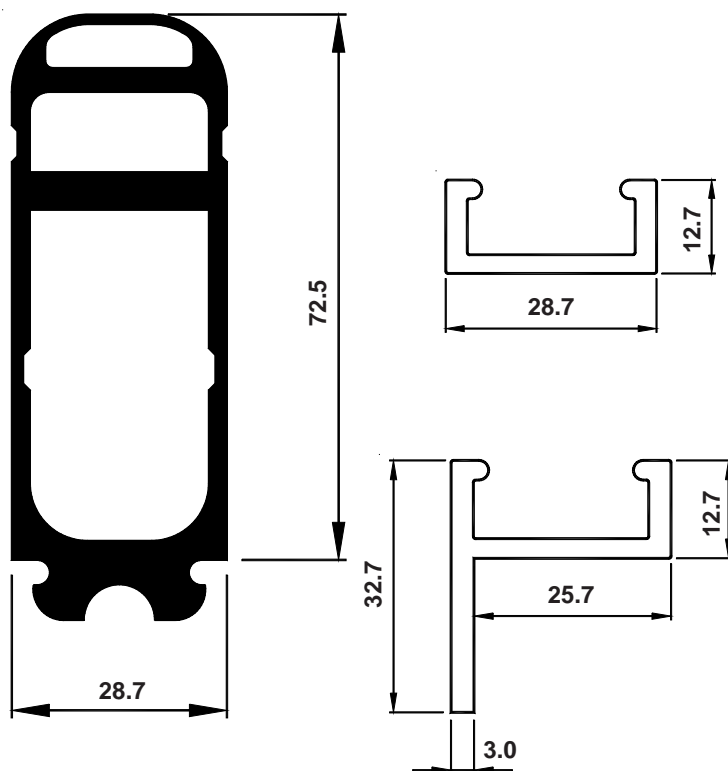

GB-02/07

Tapeswitch Ltd

Unit 38 Drumhead Road Chorley North Industrial Park Chorley Lancashire England PR6 7BX
 Tel Int +44 01257 249777 Fax Int +44 01257 246600 E-mail info@tapeswitch.co.uk Website www.tapeswitch.co.uk